



AD020 morsettiera senza viti screwless terminal box

Senza viti
Screwless
Omologata
GWT750°C e GWT850°C
Homologated
GWT750°C and GWT850°C
Standard 3 poli
Standard 3 pole
RAST 5

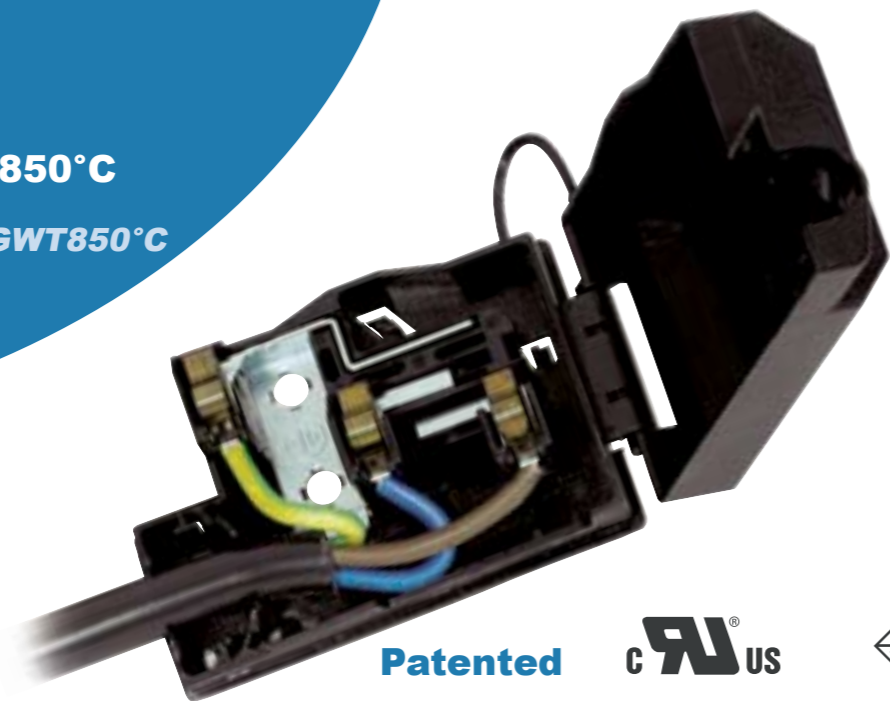

Patented

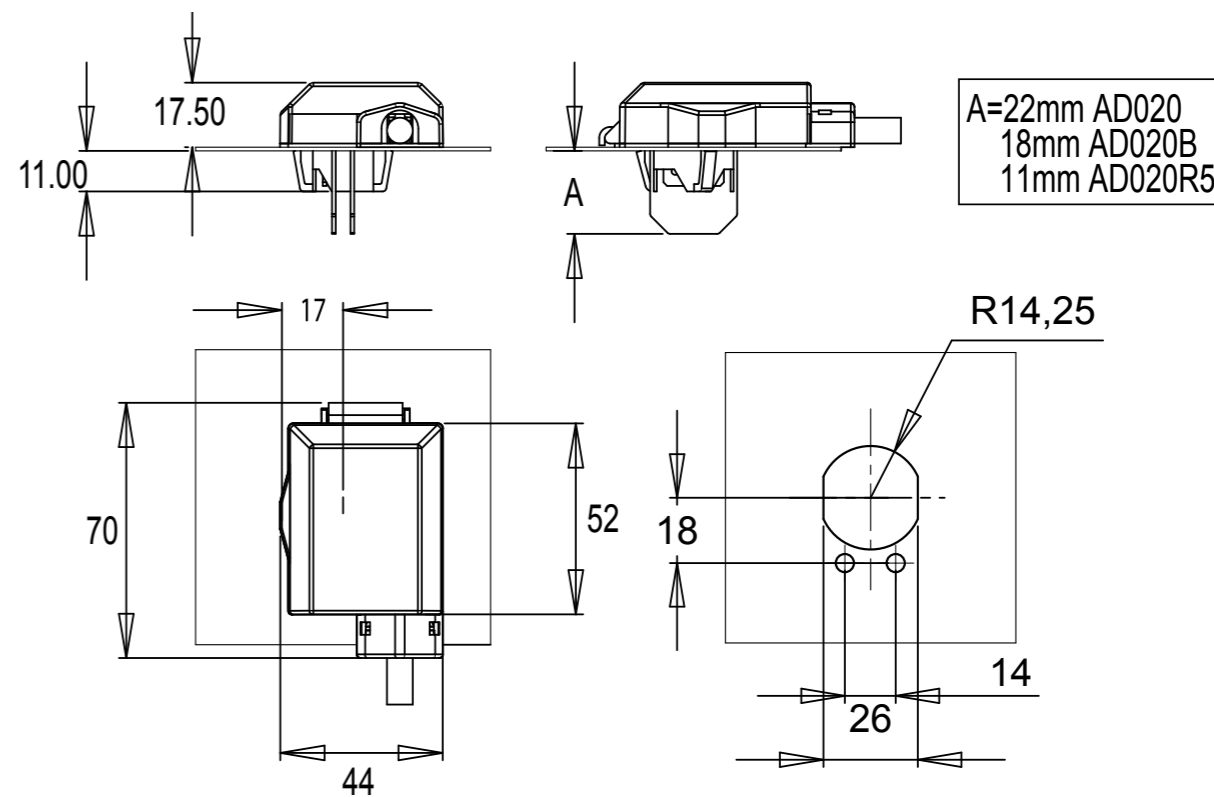

Spessore lamiera d'aggancio: da 0,6 mm a 2 mm
Fixing plate thickness: from 0.6 mm to 2 mm

AD020



AD020B



AD020R5




CARATTERISTICHE COSTRUTTIVE

- A) Corpo in poliammide 6/6 nero con fissavaco integrato.
- B) Collegamenti senza viti.
- C) Messa a terra tramite n° 2 viti autofil. 4,2x9,5 come richiesto da normativa.
- D) Su richiesta connettori rast 5 polarizzabili.
- E) 2 faston 6,3x0,8 in uscita per polo.
- F) Fissaggio all'apparecchio snap-in.


CONSTRUCTIONAL FEATURES

- A) Body in 6/6 black polyamide with integrated cable clamp.
- B) Screwless connections.
- C) Grounding by 2 self-tapping 4.2x9.5 screws according to standard.
- D) RAST 5 polarisable connectors on request.
- E) 2 x 6.3x0.8 output fastons per pole.
- F) Snap-in fixing to appliance.

1

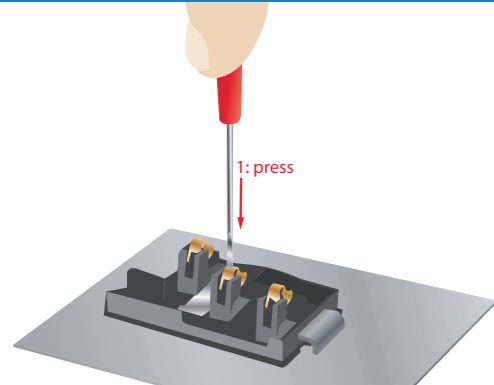

2

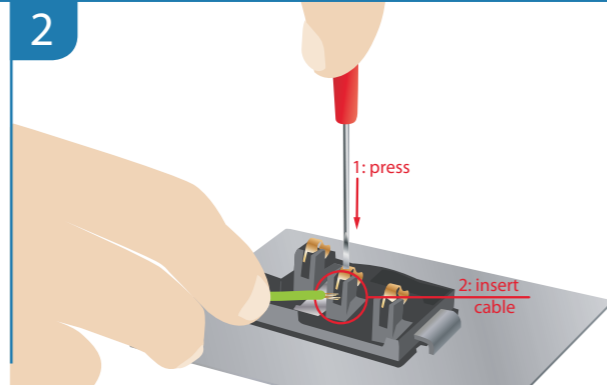

- » Predisposta per cablaggio automatizzato
- » Utilizzo di attrezzi di uso comune per cablaggi manuali e service
- » Sistema fissacavo senza viti

- » Provision for automatic wiring
- » Only common tools needed for manual wiring and servicing
- » Screwless cable fixing

DATI TECNICI	EUROPA	USA			
Norme di riferimento	EN 60998-1/2 EN 60335-1 EN 61210 (VDE 0513) UL 1977 CSA C22.2				
Standards	ENEC	UL	CSA		
Sezione cavo	da 3G0,75 a 3G2,5 mm ²	18-16 AWG	14-12 AWG	18-16 AWG	14-12 AWG
Tensione nominale	450 V	600 V			
Corrente max	24 A	10A	22A	10A	20A
Temperatura d'esercizio	125°C				
Grado di protezione	IP 30				
Materiale	Poliammide nero UL94 - V0 GWT 750°C - V2 GWT 850°C				
Parti metalliche	Acciaio zincato RoHS conforme				
Finitura cavo per connessione	Sguainato: 40-50 mm spellato/puntalino: 6-8 mm				

TECHNICAL DATA	EUROPE	USA			
Standard references	EN 60998-1/2 EN 60335-1 EN 61210 (VDE 0513) UL 1977 CSA C22.2				
Standards	ENEC	UL	CSA		
Cable section	from 3G0,75 to 3G2,5 mm ²	18-16 AWG	14-12 AWG	18-16 AWG	14-12 AWG
Nominal Voltage	450 V	600 V			
Max. Rating	24 A	10A	22A	10A	20A
Working Temperature	125°C				
Protection degree	IP 30				
Material	Black polyamide UL94 - V0 GWT 750°C - V2 GWT 850°C				
Metal parts	Zinc plated steel RoHS compliant				
Cable finishing for connection	Desheathed: 40-50 mm Stripped/tipped: 6-8 mm				

TIPO TYPE	POLI POLES	CODICE CODE	IMBALLO PACK	PESO WEIGHT	MISURE SIZE
AD020 - GWT850°C	3	2AD02030000000	500 pz.	13,8 Kg.	570x385x275mm
AD020B - GWT850°C		2AD02030B00000			
AD020R5 - GWT850°C - RAST5		2AD02030R50000			